


# ELETTRODRAGO AVANT



- Front with "AVANT" type design
- Totally independent chambers
- Mass ceramic electric elements
- Maximum working temperature 350°
- New Hybrid Control 5" panel for each room with centralized USB connection
- Trizone dynamic control system (TZS) mouth zone, center zone and rear zone, with mouth temperature regulation by dedicated probe
- Power distributor included
- Automatic start/stop daily and weekly included
- Dynamic QR-Code of anomalies diagnosis
- Steamer for each chamber with timed electrovalve
- Doors with low emission dismountable glass
- New lighting system with 2 lights for each room (furnaces width 84 - 1 light), positioned in the mouth of easy replacement
- Baking plates in "armored concrete"
- Electric board accessible from the front for easy maintenance (5-chamber ovens: electric board above the oven or hanging)
- Anticorrosion kit (i.e. steam generators heads and connecting pipes)
- Hood with one speed exhaust fan
- Removable hood grid in stainless steel

<i>Power inlet</i>	400/3N~/50
<i>Water inlet</i>	Ø 1/2" GAS
<i>Steamer drain</i>	Ø 1" GAS
<i>Steam exhaust output</i>	Ø 250 mm *

\* Minimum diameter pipe exhaust fumes 200 mm.

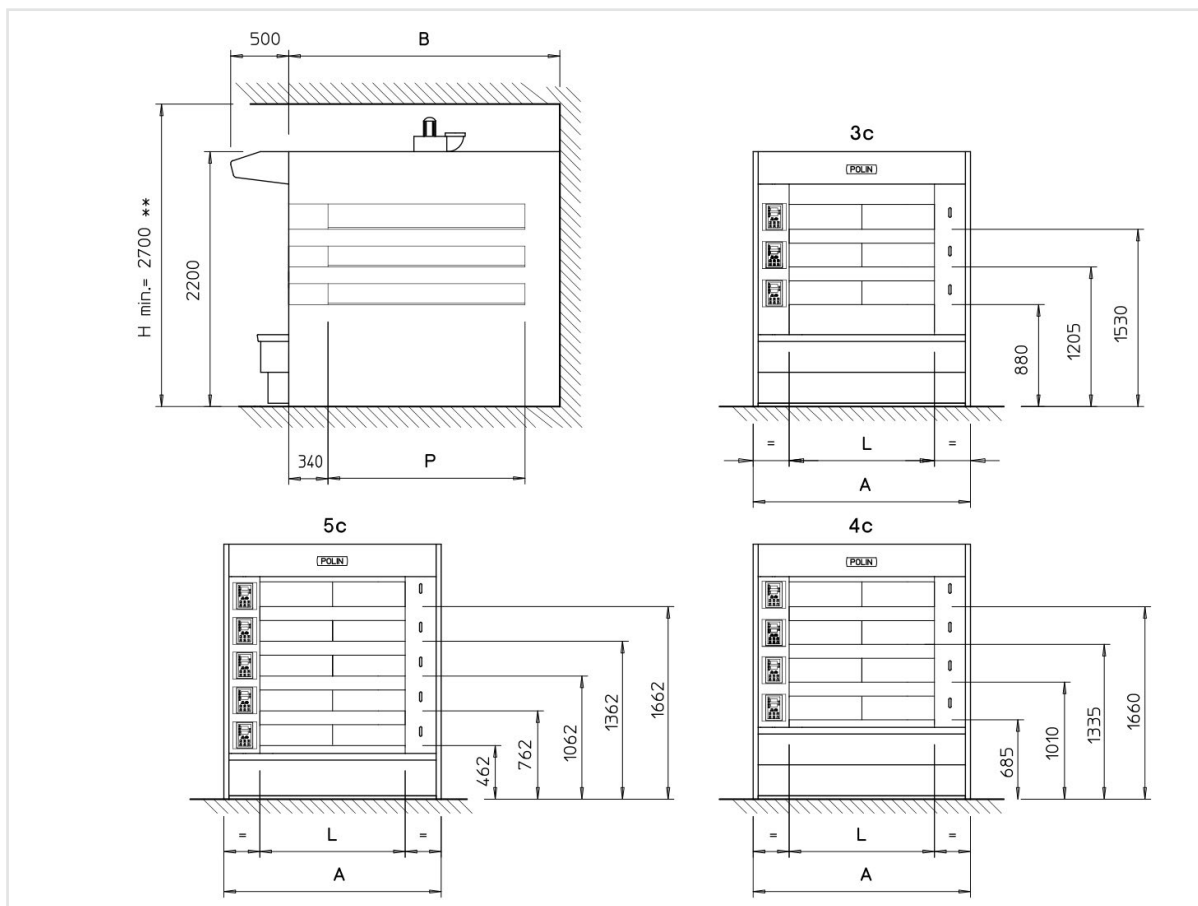

	Chambers	Useful dimension chambers		Overall dimensions		Installed power			
		Width	Depth	Width	Depth	Electric system calculator	With computer-economizer	With computer economizer for bakery manag.	Super power with steamers for electric system calc.
	n°	L mm	P mm	A mm	B mm	kW	kW	kW	kW
<b>3,2/84x126-3</b>	3	840	1260	1475	1900	22,5	17,0	8,5	34,8
<b>4,2/84x126-4</b>	4	840	1260	1475	1900	30,0	22,0	12,0	46,2
<b>5,3/84x126-5</b>	5	840	1260	1475	1900	37,0	30,5	20,0	57,6
<b>4,3/84x170-3</b>	3	840	1700	1475	2340	27,5	21,0	11,0	43,5
<b>5,7 / 84x170-4</b>	4	840	1700	1475	2340	36,5	27,5	15,0	57,6
<b>7,1 / 84x170-5</b>	5	840	1700	1475	2340	45,5	37,0	23,5	71,7
<b>5,4 / 84x214-3</b>	3	840	2140	1475	2780	33,0	25,5	13,0	54,0
<b>7,2 / 84x214-4</b>	4	840	2140	1475	2780	43,5	33,0	17,0	71,6
<b>9,0 / 84x214-5</b>	5	840	2140	1475	2780	54,0	44,0	28,0	89,1
<b>6,5 / 84x258-3</b>	3	840	2580	1475	3220	38,0	30,5	15,0	64,4
<b>8,7 / 84x258-4</b>	4	840	2580	1475	3220	50,5	38,0	20,0	85,5
<b>10,8 / 84x258-5</b>	5	840	2580	1475	3220	63,0	51,0	32,5	106,5

	Chambers	Useful dimension chambers		Overall dimensions		Installed power			
		Width	Depth	Width	Depth	Electric system calculator	With computer-economizer	With computer economizer for bakery manag.	Super power with steamers for electric system calc.
	n°	L mm	P mm	A mm	B mm	kW	kW	kW	kW
<b>4,7 / 124x126-3</b>	3	1240	1260	1875	1900	26,0	20,0	11,0	40,7
<b>6,2 / 124x126-4</b>	4	1240	1260	1875	1900	34,4	26,0	15,0	54,0
<b>7,8 / 124x126-5</b>	5	1240	1260	1875	1900	42,8	34,5	24,0	67,3
<b>6,3/124x170-3</b>	3	1240	1700	1875	2340	31,5	24,0	14,0	50,7
<b>8,4/124x170-4</b>	4	1240	1700	1875	2340	42,0	31,5	18,0	67,2
<b>10,5/124x170-5</b>	5	1240	1700	1875	2340	52,0	42,0	27,0	83,7
<b>8,0/124x214-3</b>	3	1240	2140	1875	2780	38,0	30,5	18,0	63,3
<b>10,6/124x214-4</b>	4	1240	2140	1875	2780	50,5	38,0	23,0	84,0
<b>13,3/124x214-5</b>	5	1240	2140	1875	2780	63,0	51,0	32,0	104,7
<b>9,6/124x258-3</b>	3	1240	2580	1875	3220	44,5	36,5	21,0	75,9
<b>12,8/124x258-4</b>	4	1240	2580	1875	3220	58,5	44,0	28,0	100,8
<b>16,0/124x258-5</b>	5	1240	2580	1875	3220	73,5	59,0	37,5	125,7
<b>8,0/156x170-3</b>	3	1560	1700	2195	2340	36,5	29,0	18,0	59,7
<b>10,6/156x170-4</b>	4	1560	1700	2195	2340	48,5	36,5	22,0	79,2
<b>13,3/156x170-5</b>	5	1560	1700	2195	2340	60,5	49,0	31,0	98,7
<b>10,0/156x214-3</b>	3	1560	2140	2195	2780	44,5	36,5	21,0	75,0
<b>13,5/156x214-4</b>	4	1560	2140	2195	2780	58,5	44,0	28,0	99,6
<b>16,7/156x214-5</b>	5	1560	2140	2195	2780	73,0	59,0	37,5	124,2
<b>12,0/156x258-3</b>	3	1560	2580	2195	3220	52,0	44,0	25,0	90,3
<b>16,0/156x258-4</b>	4	1560	2580	2195	3220	69,0	52,0	33,0	120,0
<b>20,1/156x258-5</b>	5	1560	2580	2195	3220	86,0	69,5	44,0	149,7
<b>9,4/186x170-3</b>	3	1860	1700	2500	2340	38,5	30,5	20,0	62,7
<b>12,5/186x170-4</b>	4	1860	1700	2500	2340	50,5	38,0	25,0	83,2
<b>15,8/186x170-5</b>	5	1860	1700	2500	2340	63,0	51,0	32,5	103,7
<b>12,0/186x214-3</b>	3	1860	2140	2500	2780	46,5	38,5	24,0	78,9
<b>16,0/186x214-4</b>	4	1860	2140	2500	2780	61,5	46,5	33,0	104,8
<b>19,9/186x214-5</b>	5	1860	2140	2500	2780	77,0	62,0	39,0	130,7
<b>14,0/186x258-3</b>	3	1860	2580	2500	3220	54,5	47,0	29,0	95,1
<b>19,0/186x258-4</b>	4	1860	2580	2500	3220	72,5	54,5	39,0	126,4
<b>24,0/186x258-5</b>	5	1860	2580	2500	3220	90,0	73,0	46,0	157,7

	Chambers	Useful dimension chambers		Overall dimensions		Installed power			
		Width	Depth	Width	Depth	Electric system calculator	With computer-economizer	With computer economizer for bakery manag.	Super power with steamers for electric system calc.
	n°	L mm	P mm	A mm	B mm	kW	kW	kW	kW
<b>11,9/234x170-3</b>	3	2340	1700	2980	2340	45,5	38,0	24,0	75,9
<b>15,9/234x170-4</b>	4	2340	1700	2980	2340	60,5	45,5	32,0	100,8
<b>19,9/234x170-5</b>	5	2340	1700	2980	2340	75,5	59,5	40,0	125,7
<b>15,0/234x214-3</b>	3	2340	2140	2980	2780	55,5	48,0	28,0	96,0
<b>20,0/234x214-4</b>	4	2340	2140	2980	2780	74,0	55,5	39,0	127,7
<b>25,1/234x214-5</b>	5	2340	2140	2980	2780	92,0	74,0	48,0	159,3
<b>18,1/234x258-3</b>	3	2340	2580	2980	3220	65,5	58,0	33,0	116,2
<b>24,1/234x258-4</b>	4	2340	2580	2980	3220	87,5	65,5	45,0	154,5
<b>30,2/234x258-5</b>	5	2340	2580	2980	3220	109,0	87,0	56,0	193,0
<b>12,6/248x170-3</b>	3	2480	1700	3125	2340	46,6	39,0	25,0	77,7
<b>16,8/248x170-4</b>	4	2480	1700	3125	2340	61,8	46,5	32,0	103,2
<b>21,0/248x170-5</b>	5	2480	1700	3125	2340	77,0	61,5	41,0	128,7
<b>16,0/248x214-3</b>	3	2480	2140	3125	2780	56,9	49,5	29,0	98,4
<b>21,2/248x214-4</b>	4	2480	2140	3125	2780	75,6	57,0	39,0	130,8
<b>26,5/248x214-5</b>	5	2480	2140	3125	2780	94,3	75,5	49,0	163,2
<b>19,2/248x258-3</b>	3	2480	2580	3125	3220	67,3	59,5	34,0	119,1
<b>25,6/248x258-4</b>	4	2480	2580	3125	3220	89,4	67,0	46,0	158,4
<b>32,0/248x258-5</b>	5	2480	2580	3125	3220	111,5	89,5	57,0	197,7